

LP 50 EH Pre-Press Technology Baler



Friction Channel

- Friction channel pressure control within a fixed frame
- The upper friction flap pressure controlled by means of a hydraulic cylinder
- The friction flap pressure level adjustable from the control panel.
- Side friction flaps controlled manually by means of adjusting screws

Main press

- Top and bottom with cam design for better sealing
- The unit is journaled in four heavy-duty wheels guided on wear rails mounted in the bottom press
- Sturdy wear blocks on side and top

Prepress

- Heavy duty bearings for the pre-press shaft
- Bearings with exchangeable shaft sleeves
- Detection system of the pre-press position during operation to secure a safe interlock of inspection hatches and protection covers.

Chassis

- Bottom plate made of 16 mm Hardox 400 long-life resistant steel
- Exchangable wear rails in the bottom
- Support legs (optional) to eliminate the need of a needle pit

Hydraulic System

- Main drive motor 22 kW (EH1), 37kW (EH2) and 45 kW (EH3) with a double hydraulic pump system
- Oil level control system
- Oil temperature transmitter - oil temperature indicated on control panel screen
- Oil cooler
- Oil heater (optional)

Strapping


- Strapping system with five bow shaped needles mounted on a needle assembly device under the friction channel
- Simple and reliable twisting unit
- Wire guiding system for big wire coils
- Twisting unit adjustable for bailing of plastics (optional) with an increased number of twisting's

Control System

- Siemens PLC
- MiniPremi HMI system for operation control and monitoring
- Quick couplings for quick and safe installation
- A photocell system for baler and conveyor control
- Two photocell levels for maximum control of press cycle when baling materials with different pre-bale densities
- Stronger photocells (optional) for maximum control when baling dusty or greasy material
- GSM modem (optional) for online trouble shooting and software updates



LP 50 EH General Dimensions

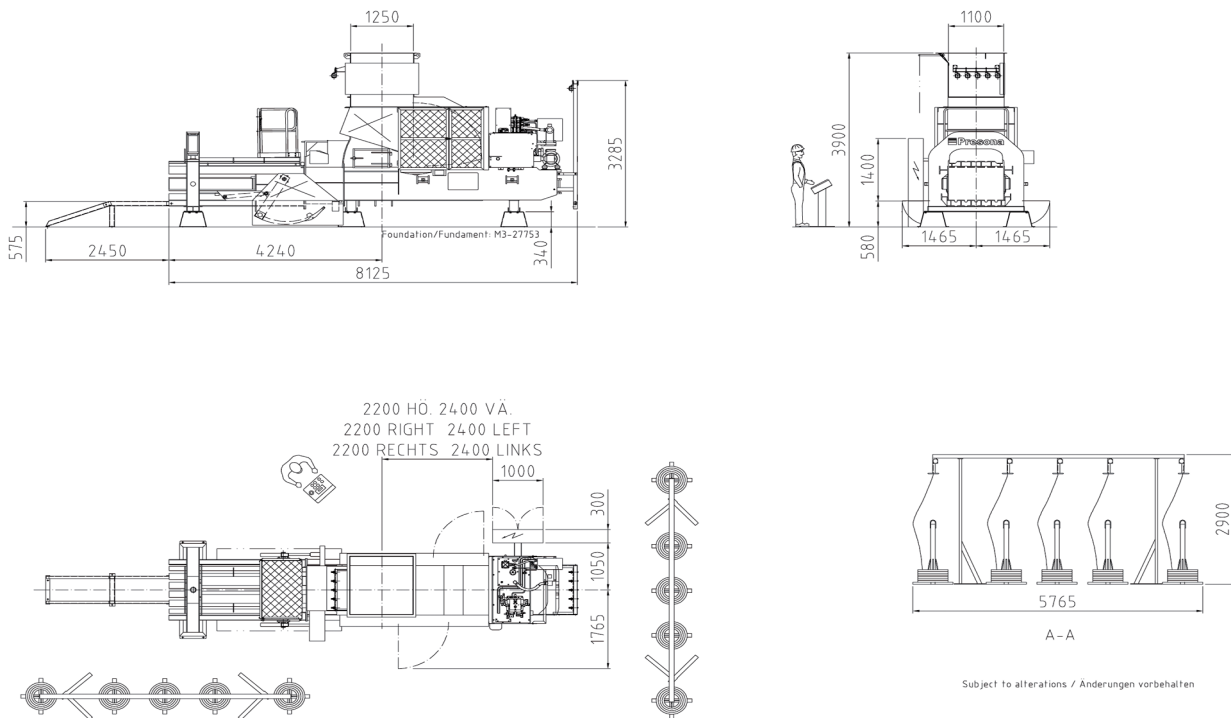

Technical Data		LP 50 EH1	LP 50 EH2	LP 50 EH3
Theoretical volume capacity	m ³ /hour	530	640	830
Max volume capacity	m ³ /hour	260	340	430
Weight capacity*	tonnes/hour	6 - 14	8 - 22	10 - 27
Feed opening L x W	mm	1250 x 1100	1250 x 1100	1250 x 1100
Bale size H x W (Length variable)	mm	720 x 1100	720 x 1100	720 x 1100
Bale weight	Kg/m ³	400 - 550	400 - 550	400 - 550
No. of vertical strapping wires		5	5	5
Press force pre-press	tonnes	25	25	25
Press force main press	tonnes	50	50	50
Specific pressure	N/cm ²	63	63	63
Max oil pressure	Bar	250	250	250
Oil tank capacity	Litres	600	600	1000
Electric motor	kW	1 x 22	1 x 37	1 x 45
Oil cooler	kW	1 x 1,5	1 x 1,5	1 x 1,5
Net weight	tonnes	16	16	16

* Pre-bale density 30 - 100 kg/cbm

Performance rates and bale densities are subject to moisture, material pre-bale densities, feed rate and other variables when baling.

As part of our continuous product development, specifications are subject to change without notice.

For more information about our products, contact:

Presona AB

P.O. Box 63 SE-273 22 Tomelilla, Tel +46 417 19900 Fax +46 417 19932

E-mail sales@presona.se, www.presona.com