


ORWAK 3250

ORWAK 3250 is the right choice when you want a baler that produces big bales, up to 250 kg, yet provides simplicity, and is easy to install in different environments thanks to 230 V single phase operation. ORWAK 3250 gives you value for the money. Big bales, big savings!



SINGLE PHASE
INSTALLATION

BALE WEIGHT
CARDBOARD



ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY ORWAK 3250?

- Impressive bales in size and weight
- Single phase unit, easy to place in different environments
- The best choice for medium size volumes of cardboard and plastic

ORWAK
PART OF SULO GROUP

ORWAK 3250

Single phase baler that produces 250 kg bales



SMART DESIGN, STRONG COMPACTION


Smart machine design for easy transportation and installation. Thanks to two powerful cylinders, the baler offers effective compaction.

AUTOSTART FOR EFFICIENT COMPACTION

An autostart function allows the baler to start compacting the material as soon as you close the door.

BALE EJECTION

The bales weigh up to 250 kg and are easily removed thanks to a semi-automatic bale ejection function.

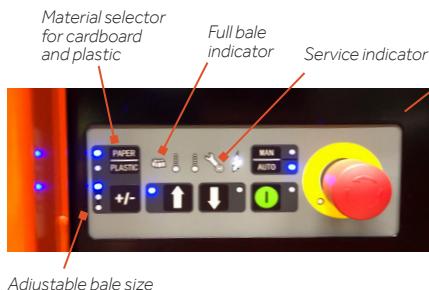

- User-friendly panel
- Autostart
- Adjustable bale height in three sizes

ORWAK 3250 IS OPTIMIZED FOR:

PAPER

- Cardboard
- Shredded paper

PLASTIC FOIL

- Shrink film
- Plastic bags

SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Thanks to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.

ORWAK CONNECT COMMUNICATION


ORWAK 3250 is ready to communicate when choosing the option Orwak Connect. It is a modern-based communication service enabling the baler to send updates and alerts to the caretaker as well as vital information and bale statistics to the web portal.

Complies with the EN 16500:2014 safety requirement standard for vertical balers

DIMENSIONS & SPECIFICATIONS

DIMENSIONS

A	B	C	D	TRANSPORT-HEIGHT
2970 mm	1732 mm	1036 mm	2270 mm	2170 mm

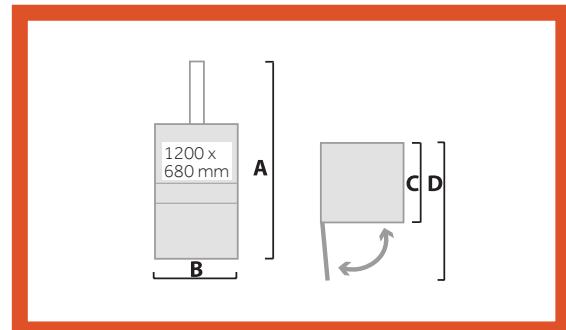

TECHNICAL SPECIFICATIONS

LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	MACHINE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 1200 mm Height: 680 mm	46 secs	HP: 15 ton, 150 kN LP: 10 ton, 100 kN	Width: 1200 mm Depth: 800 mm Height: 1000 mm	Cardboard: Up to 250 kg Plastic: Up to 290 kg	1050 kg	<70 db (A)	IP 55	Single Phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

GAMA COMMUNICATION LTD

Gama Bldg.
16 Menachem Begin St.
5270003 Ramat Gan
ISRAEL
Phone: +972-3-6130666
E-Mail: gama@actcom.co.il

GAMAENGINEERING.CO.IL

ORWAK
PART OF **SULO** GROUP