

ORWAK COMPACT 3110

The ORWAK COMPACT 3110 is perfect for companies with small amounts of packaging waste. Thanks to the low height in combination with the small footprint, it fits where you need it to be! It is a small but effective baler and it gives a volume reduction up to 7:1.



Complies to
EN 16500
Safety standard

ORWAK




**SMALL
FOOTPRINT**

50 KG

**BALE WEIGHT
CARDBOARD**

ORWAK BENEFITS

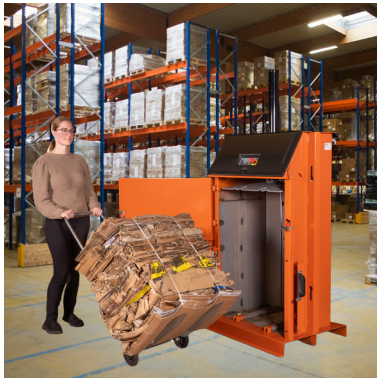

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY ORWAK COMPACT?

- Strong compaction on the spot! Requires little space, yet provides effective volume reduction
- Easy-to-handle light weight bales
- The best choice for small to medium size volumes of cardboard and plastic

ORWAK
PART OF **SULO** GROUP

ORWAK COMPACT 3110

Compact and versatile baler
– fits where you need it!

SMALL FOOTPRINT


The 3110 fits where you need it to be thanks to the compact design and small footprint.

AUTOSTART FOR EFFICIENT COMPACTION

An autostart function allows the baler to start compacting the material as soon as you close the door.

BALE TROLLEY INCLUDED

Model 3110 is always delivered with a bale trolley for effortless baling and smooth internal transportation of the bale.

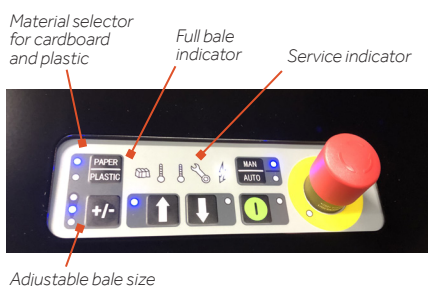

- User-friendly panel
- Autostart
- Adjustable bale height in three sizes
- Top cover made of recycled plastic
- Bale trolley included

ORWAK COMPACT 3110 IS OPTIMIZED FOR:

PAPER

- Cardboard
- Shredded paper

PLASTIC FOIL

- Shrink film
- Plastic bags

OTHER METALS

- Steel straps

OTHER PLASTICS

- Plastic straps

SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Thanks to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.

ORWAK CONNECT COMMUNICATION

The COMPACT balers are ready to communicate when choosing the option Orwak Connect. It is a modem-based communication service enabling the baler to send updates and alerts to the caretaker as well as vital information and bale statistics to the web portal.

Complies with the EN 16500:2014 safety requirement standard for vertical balers


DIMENSIONS & SPECIFICATIONS

DIMENSIONS				
A	B	C	D	E
1990 mm	866 mm	720 mm	1460 mm	694 mm

ENERGY CONSUMPTION	
STANDBY MODE	MAXIMUM OPERATION ONE HOUR
0.6 W/H	580 W/H

TECHNICAL SPECIFICATIONS								
LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	MACHINE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 730 mm Height: 408 mm	33 secs	HP: 4 ton, 40 kN LP: 3 ton, 30 kN	Width: 700 mm Depth: 500 mm Height: 600 mm	Cardboard: Up to 50 kg Plastic: Up to 70 kg	252 kg	62.3 db (A)	IP 55	Single Phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

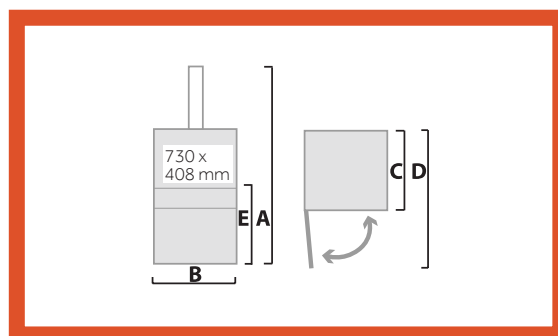

GAMA COMMUNICATION LTD

Gama Bldg.
16 Menachem Begin St.
5270003 Ramat Gan
ISRAEL
Phone: +972-3-6130666
E-Mail: gama@actcom.co.il

GAMAENGINEERING.CO.IL

ORWAK
PART OF SULO GROUP